

FLEX TAPE


TRONIX

June
2010

2 year
warranty




STANDARD IP20

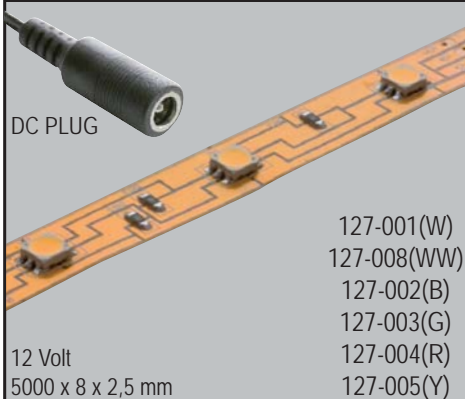


| | Power per meter | LED's per meter | Length to cut | Max. to connect | Lumen p/m white | LED type | Angle | IP |
|--------|-----------------|-----------------|---------------|-----------------|-----------------|----------|-------|----|
| 127-00 | 4 W | 60 | 5 cm | 5 m | 265 | SMD | 120° | 20 |

HI BRIGHT IP20

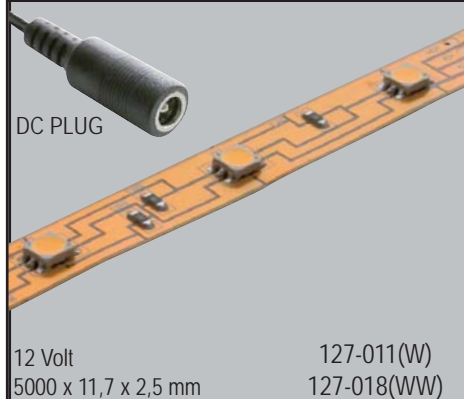


| | Power per meter | LED's per meter | Length to cut | Max. to connect | Lumen p/m | LED type | Angle | IP |
|---------|-----------------|-----------------|---------------|-----------------|-----------|----------|-------|----|
| 127-011 | 4,8 W | 30 | 10 cm | 5 m | 540 | HiBri | 140° | 20 |
| 127-018 | 4,8 W | 30 | 10 cm | 5 m | 390 | HiBri | 120° | 20 |

RGB IP20

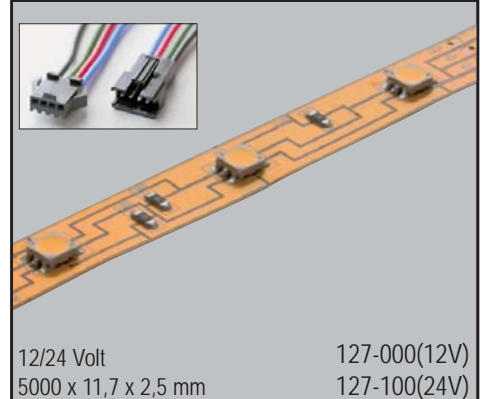


| | Power per meter | LED's per meter | Length to cut | Max. to connect | Lumen p/m | LED type | Angle | IP |
|---------|-----------------|-----------------|---------------|-----------------|-----------|----------|-------|----|
| 127-000 | 5 W | 30 | 10 cm | 5 m | N/A | RGB | 120° | 20 |
| 127-100 | 8,8 W | 48 | 12,5 cm | 10 m | N/A | RGB | 120° | 20 |

STANDARD IP65

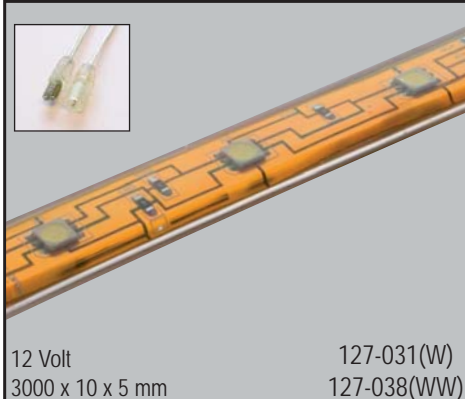


| | Power per meter | LED's per meter | Length to cut | Max. to connect | Lumen p/m | LED type | Angle | IP |
|---------|-----------------|-----------------|---------------|-----------------|-----------|----------|-------|----|
| 127-031 | 4 W | 60 | 5 cm | 6 m | 265 | SMD | 120° | 65 |
| 127-038 | 4 W | 60 | 5 cm | 6 m | 265 | SMD | 120° | 65 |

HI BRIGHT IP65

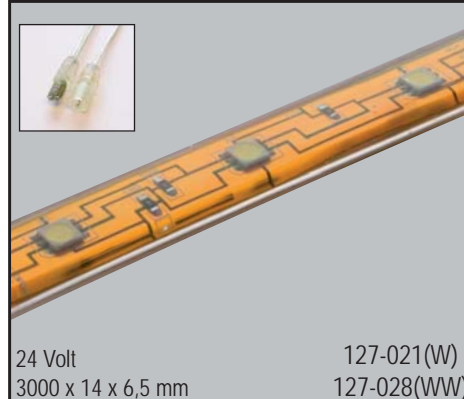


| | Power per meter | LED's per meter | Length to cut | Max. to connect | Lumen p/m | LED type | Angle | IP |
|---------|-----------------|-----------------|---------------|-----------------|-----------|----------|-------|----|
| 127-021 | 12 W | 50 | 10 cm | 9 m | 900 | HiBri | 120° | 65 |
| 127-028 | 12 W | 50 | 10 cm | 9 m | 650 | HiBri | 120° | 65 |

RGB IP65

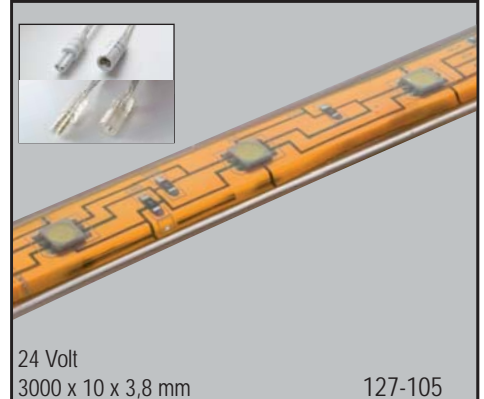

| | Power per meter | LED's per meter | Length to cut | Max. to connect | Lumen p/m | LED type | Angle | IP |
|---------|-----------------|-----------------|---------------|-----------------|-----------|----------|-------|----|
| 127-105 | 8,8 W | 48 | 12,5 cm | 6 m | N/A | RGB | 120° | 65 |

VERTICAL IP54

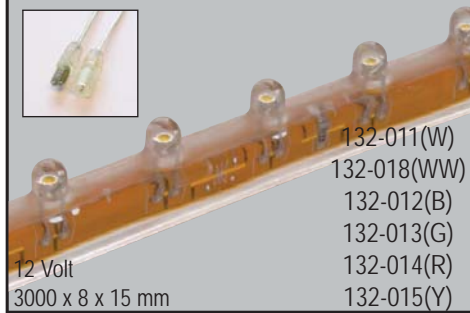


132-011(W)
132-018(WW)
132-012(B)
132-013(G)
132-014(R)
132-015(Y)

12 Volt
3000 x 8 x 15 mm

| | Power per meter | LED's per meter | Length to cut | Max. to connect | Lumen p/m | LED type | Angle | IP |
|---------|-----------------|-----------------|---------------|-----------------|-----------|----------|-------|----|
| 132-011 | 3.3 W | 60 | 5 cm | 6 m | 240 | Flux | 80° | 54 |
| 132-018 | 3.3 W | 60 | 5 cm | 6 m | 210 | Flux | 80° | 54 |

SUPER FLEX VERTICAL

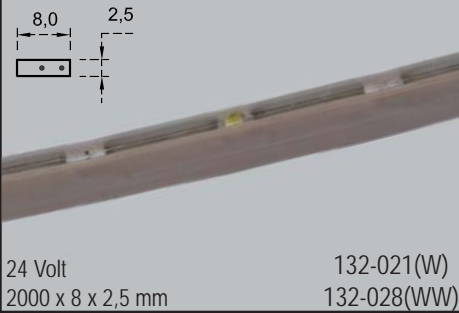


24 Volt
2000 x 8 x 2,5 mm

132-021(W)
132-028(WW)

| | Power per meter | LED's per meter | Length to cut | Max. to connect | Lumen | LED type | Angle | IP |
|---------|-----------------|-----------------|---------------|-----------------|-------|----------|-------|----|
| 132-021 | 2.2 W | 36 | 16,7 cm | 20 m | - | SMD | 120° | 67 |
| 132-028 | 2.2 W | 36 | 16,7 cm | 20 m | - | SMD | 120° | 67 |

SUPER FLEX MINI

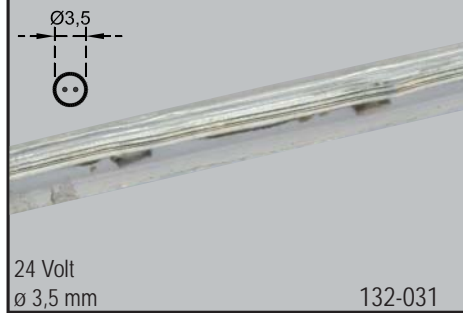


24 Volt
ø 3,5 mm

132-031

| | Power per meter | LED's per meter | Length to cut | Max. to connect | Lumen | LED type | Angle | IP |
|---------|-----------------|-----------------|---------------|-----------------|-------|----------|-------|----|
| 132-031 | 2.2 W | 36 | no | 10 m | - | SMD | 120° | 67 |

SILICON STRING IP65

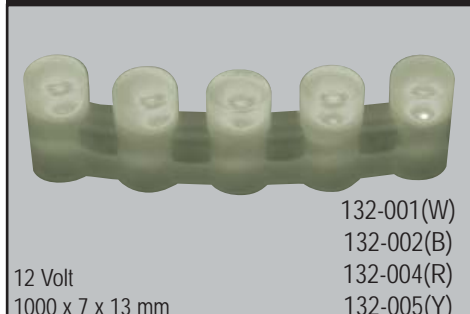


132-001(W)
132-002(B)
132-004(R)
132-005(Y)

12 Volt
1000 x 7 x 13 mm

| | Power per meter | LED's per meter | Length to cut | Max. to connect | Lumen p/m | LED type | Angle | IP |
|---------|-----------------|-----------------|---------------|-----------------|-----------|----------|-------|----|
| 132-001 | 7.7 W | 96 | 3,3 cm | 1 m | 315 | Flux | 100° | 65 |

CONNECTOR SET

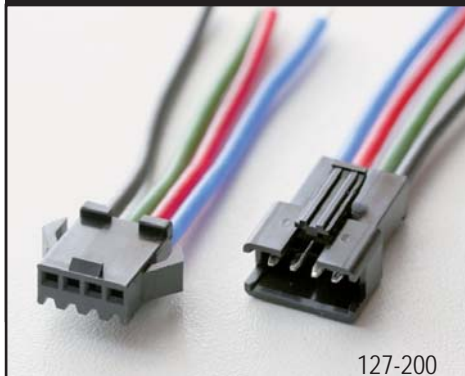

127-200

ACC2-1 Connector set for 127-000 and 127-100 Flex Tape Horizontal RGB.

CONNECTOR SET



127-201

ACC2*2-1F Connector set for 127-105 and 127-110 Waterproof Flex Tape RGB.

CONNECTOR SET



127-203

ACC2-1F Connector set for Standard IP65, Hi Bright IP65 and Vertical IP54 Flex Tape.

SWITCHING WALL WART

12V - 6W

IP20



65 x 30 x 58 mm

215-020

SWITCHING WALL WART

12/24V - 12/24W

IP20



75 x 43 x 30 mm
87 x 52 x 31 mm
87 x 52 x 31 mm

215-030(12V-12W)
215-040(12V-24W)
215-042(24V-24W)

SWITCHING POWER BLOCK

12/24V - 200W

IP20



215-054(12V)
215-056(24V)

199 x 110 x 50 mm

SWITCHING POWER BLOCK

24V - 96W

IP20



170 x 92 x 58 mm

215-057

SWITCHING POWER BLOCK

IP67



215-045 (12V/48W/IP67)
215-046 (12V/96W/IP67)
215-300 (24V/30W/IP67)
215-301 (24V/60W/IP67)

130 x 66 x 45 mm