


# LED DOWN LIGHT

Architectural/commercial line

## ALUMINIUM DOWN LIGHT WITH DRIVER

136-008 not dimmable  
136-018 dimmable

2 year  
warranty

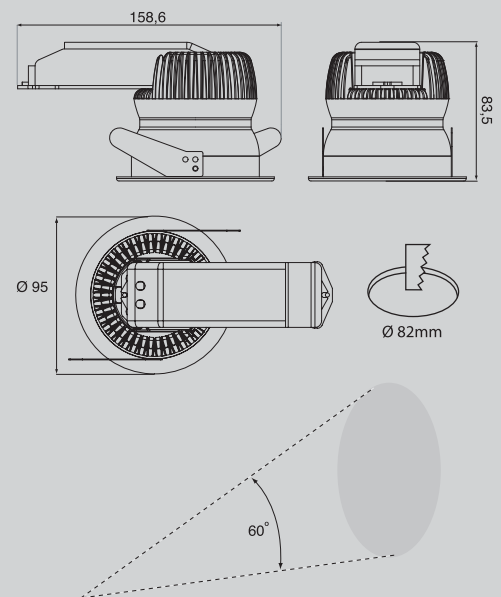

**DL-1-10W** Aluminium Down Light with 10 Watt Cree ME-C LED in warm white. Driver included. Including 1,2 meter power cable with flat Euro plug. Also available as dimmable version. Applications: retail shops, hotels, meeting rooms, passages etc.

	Housing color	Color	Power	Lumen	Kelvin +/- 10%	Angle	Dimmable
136-008	RAL9003	warm white	10W	370	3000	60°	No
136-018	RAL9003	warm white	10W	370	3000	60°	Yes*

\* Dimmable with Trailing Edge dimmer (halogen dimmer).

# LED DOWN LIGHT

Architectural/commercial line

## DOWN LIGHT 30 WATT



2 year  
warranty

### SPECIFICATIONS

Housing color	White
Color	Warm White
Power	30W
Lumen	1650
Kelvin +/- 10%	3500
Angle	90°
Dimension	ø227 x 124mm
Dimmable	No

136-054

## DOWN LIGHT 20 WATT



2 year  
warranty

### SPECIFICATIONS

Housing color	RAL9003
Color	Warm White
Power	20W
Lumen	1100
Kelvin +/- 10%	3500
Angle	60°
Dimension	ø191 x 89mm
Dimmable	No

136-053

# LED DOWN LIGHT

Architectural/commercial line

## DOWN LIGHT 15 WATT TURNABLE



2 year  
warranty

### SPECIFICATIONS

Housing color	RAL9003
Color	Warm White
Power	15W
Lumen	825
Kelvin +/- 10%	3500
Angle	60°
Dimension	ø190 x 165mm
Dimmable	No

136-052

## DOWN LIGHT 10 WATT WITH COVER



2 year  
warranty

### SPECIFICATIONS

Housing color	RAL9003
Color	Warm White
Power	10W
Lumen	550
Kelvin +/- 10%	3500
Angle	90°
Dimension	ø132 x 110mm
Dimmable	No

136-051

# LED DOWN LIGHT

Architectural/commercial line

## DOWN LIGHT 5 WATT WITH COVER



### SPECIFICATIONS

Housing color	RAL9003
Color	Warm White
Power	5W
Lumen	275
Kelvin +/- 10%	3500
Angle	90°
Dimension	ø112 x 97mm
Dimmable	No

136-050

## BULLEYE 5 WATT



### SPECIFICATIONS

Housing color	RAL9003
Color	Warm White
Power	5W
Lumen	275
Kelvin +/- 10%	3500
Angle	115°
Dimension	ø154 x 96mm
Dimmable	No

136-055

## BULLEYE 10 WATT



### SPECIFICATIONS

Housing color	RAL9003
Color	Warm White
Power	10W
Lumen	550
Kelvin +/- 10%	3500
Angle	115°
Dimension	ø154 x 96mm
Dimmable	No

136-056