
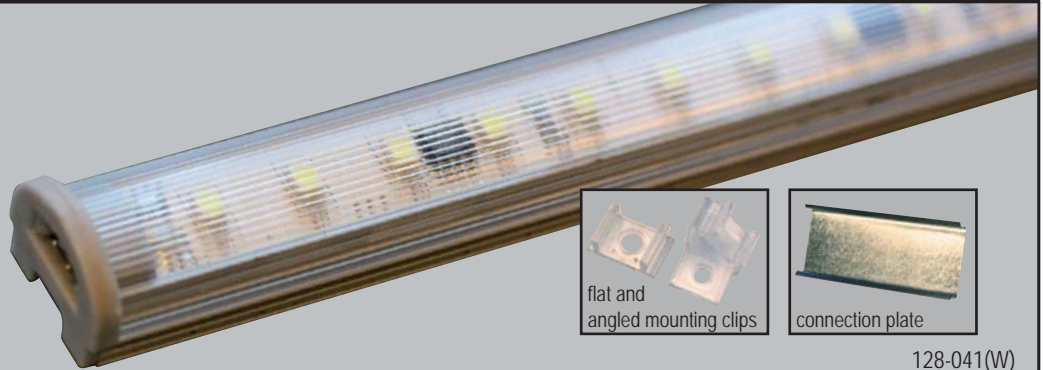


# LIGHT BAR

## ALUMINIUM HI BRIGHT

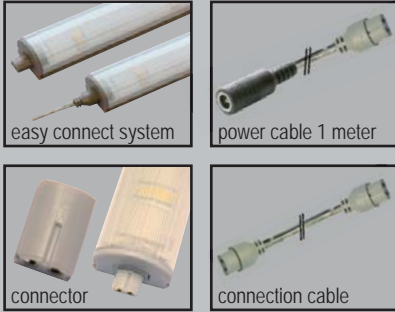

24 Volt  
500 x 19 x 14 mm



128-041(W)  
128-028(WW)

	Power	Number of LEDs	Max. to connect	Color	Lumen	LED type	Angle	IP
128-041	4 W	45	10	white 6500K	270	SMD	120°	20
128-028	4 W	45	10	warm white 3000K	200	SMD	120°	20

*Application kitchen and cabinet*

*All pictured accessoires are included*

## ALUMINIUM HIGH POWER

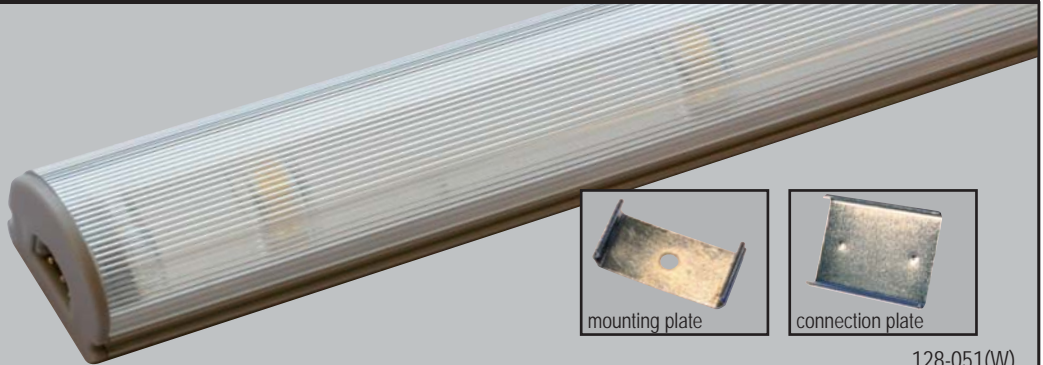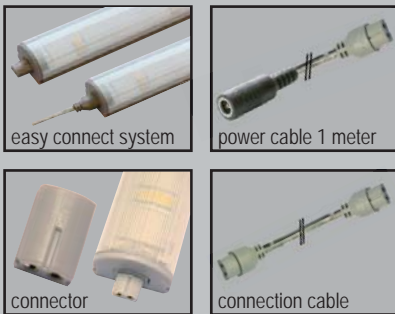

24 Volt  
300 x 25 x 15,5 mm


128-051(W)  
128-038(WW)

	Power	Number of LEDs	Max. to connect	Color	Lumen	LED type	Angle	IP
128-051	6,8 W	5	10	white 6500K	400	Nichia 1W	120°	20
128-038	6,8 W	5	10	warm white 3000K	350	Nichia 1W	120°	20

*Application shop shelf, window, show case*

*All pictured accessoires are included*

## ALUMINIUM WATER PROOF

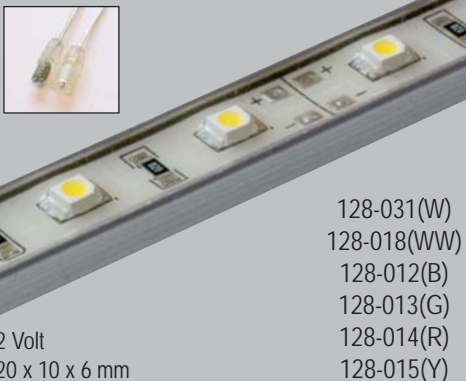

128-031(W)  
128-018(WW)  
128-012(B)  
128-013(G)  
128-014(R)  
128-015(Y)

12 Volt  
520 x 10 x 6 mm

	Power	Number of LEDs	Color	lmcid	LED type	Angle	IP
128-031	2,4 W	30	white	1500	SMD	120°	54
128-018	2,4 W	30	warm white	1500	SMD	120°	54

## FLUX WATER PROOF



12 Volt  
800 x 18 x 13 mm  
1000 x 18 x 13 mm

	Power	Number of LEDs	Color	Lumen	LED type	Angle	IP
128-021	4 W	50	white	247	Flux	80°	67
128-011	4,8 W	60	white	296	Flux	80°	67

## FLUX RGB WATER PROOF



12 Volt  
420 x 18 x 13 mm

	Power	Number of LEDs	Color	Lumen	LED type	Angle	IP
128-021	1,7 W	24	RGB	n.a.	Flux	80°	67

## MINI LIGHT BAR FLUX



126-001(W)  
126-002(B)  
126-003(G)  
126-004(R)  
126-005(Y)

12 Volt  
20 x 15 x ? mm

	Power	Number of LED's	Color	Lumen	LED type	Angle	IP
126-00	0,08 W	1	WBGY	?	?	?°	20

## MINI LIGHT BAR FLUX




126-011

12 Volt  
60 x 15 x ? mm

	Power	Number of LED's	Color	Lumen	LED type	Angle	IP
126-011	0,24 W	3	white	?	?	?°	20

## MINI LIGHT BAR FLUX RGB

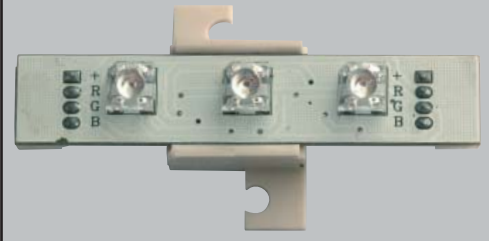


125-050

12 Volt  
75 x 15 x ? mm

	Power	Number of LED's	Color	Lumen	LED type	Angle	IP
125-050	0,21 W	3	RGB	?	?	?°	20

## LIGHT BAR RGB

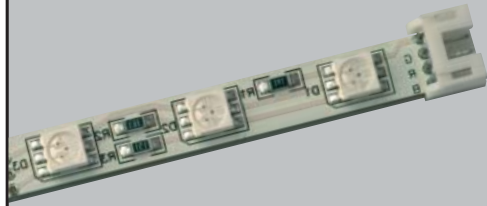

125-060

12 Volt  
570 x 8 x 3,6 mm

	Power	Number of LED's	Color	Lumen	LED type	Angle	IP
125-060	7,2 W	30	RGB	n.a.	SMD	100°	20

