


LED FloodLight

Architectural/commercial line

The perfect solution to light up billboards, buildings, shops, shop windows, trees and gardens.



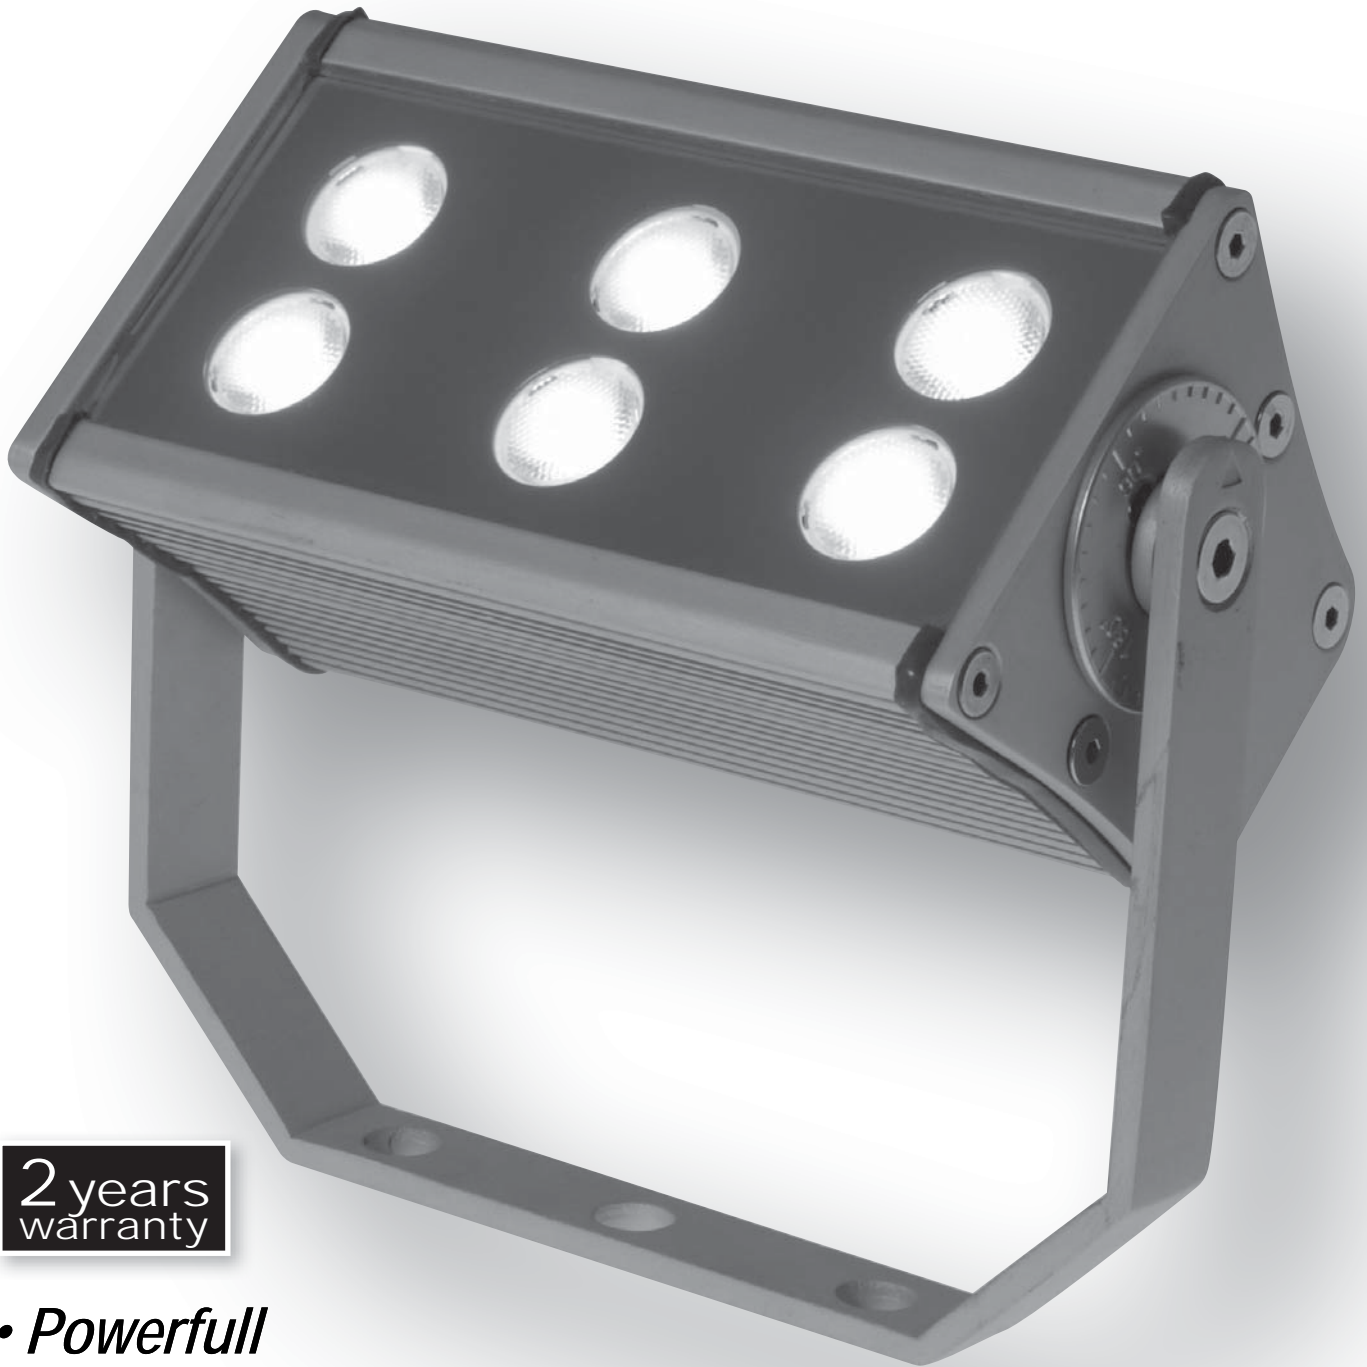


**2 years
warranty**

- *Powerfull*
- *Environment friendly*
- *Low energy consumption*
- *Only 18 Watt*

LED FloodLight

Architectural/commercial line

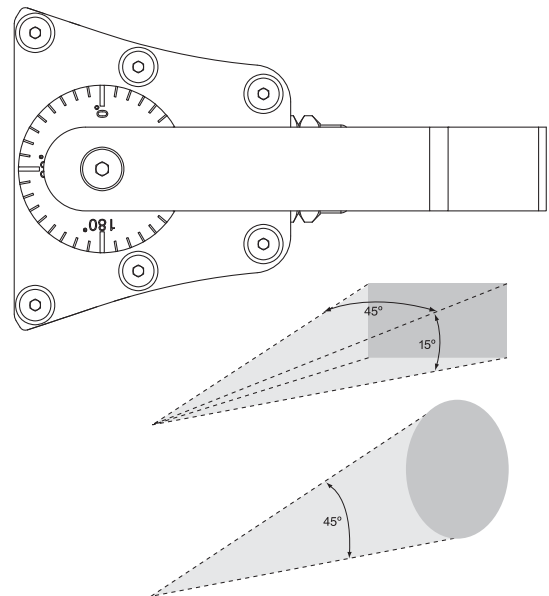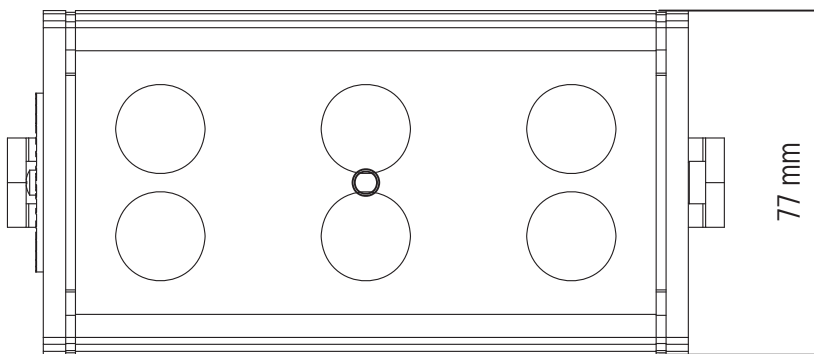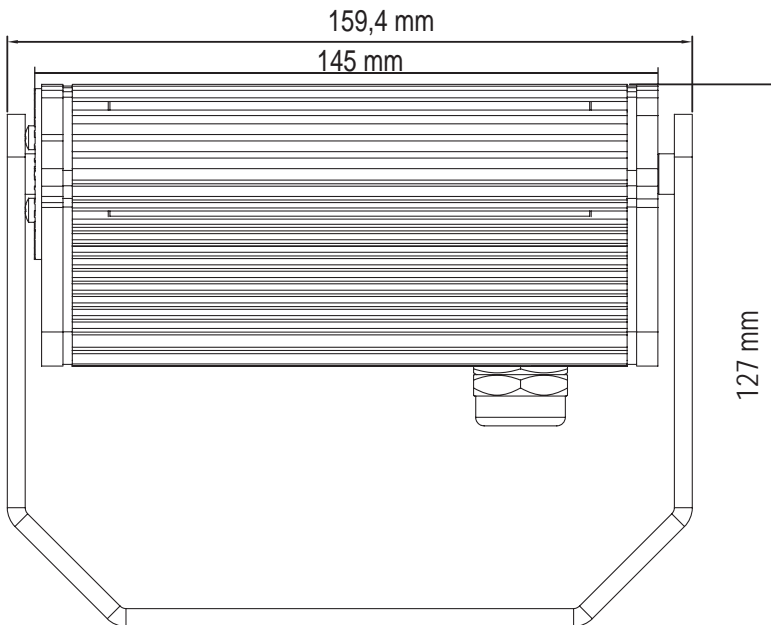

LED FloodLight is rail mountable.

Mounting advice:

Please note that the lifetime of CREE LED's depends on operation conditions. The cooler the LED, the longer the lifetime. Under favourable conditions CREE LED's operate for 50.000 hours with keeping 70% of the original light output. It is advisable to mount the FloodLight in a way that ensures maximum air circulation.

	FL-6-3W W	FL-6-3W WW	FL-6-3W B	FL-6-3W-S W	FL-6-3W-S WW	FL-6-3W-S A
Power supply	230 Volt	230 Volt	230 Volt	230 Volt	230 Volt	230 Volt
Power consumption	18 Watt	18 Watt	18 Watt	18 Watt	18 Watt	18 Watt
LED	6x P4	6x P3	6x 3 Watt	6x P4	6x P3	6x 3 Watt
Lumen	840	643	not applicable	840	643	not applicable
Color temperature	White	Warm white	Blue	White	Warm white	Amber
Light angle	15° x 45°	15° x 45°	15° x 45°	45° symetric	45° symetric	45° symetric
Housing material	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
Housing surface	Anodized aluminium	Anodized aluminium	Anodized aluminium	Anodized aluminium	Anodized aluminium	Anodized aluminium
Water resistance	IP65	IP65	IP65	IP65	IP65	IP65
Power cable	2 m rubber 3x1 mm ²	2 m rubber 3x1 mm ²	2 m rubber 3x1 mm ²	2 m rubber 3x1 mm ²	2 m rubber 3x1 mm ²	2 m rubber 3x1 mm ²
Power plug	Schuko	Schuko	Schuko	Schuko	Schuko	Schuko
Weight	1,15 kg	1,15 kg	1,15 kg	1,15 kg	1,15 kg	1,15 kg
Order code	146-011	146-018	146-012	146-021	146-028	146-026





LED FloodLight

Architectural/commercial line

Perfect for Lighting up larger trees, small buildings, billboards and shops.




	FL-4-3W WW	FL-4-3W G
Power supply	230 Volt	230 Volt
Power consumption	12 Watt	12 Watt
LED	4x P3	4x 3 Watt
Lumen	428	not applicable
Color	Warm white	Green
Light angle	45° symetric	45° symetric
Housing material	Aluminium	Aluminium
Housing surface	Anodized aluminium	Anodized aluminium
Water resistance	IP65	IP65
Power cable	2 m rubber 3x1 mm ²	2 m rubber 3x1 mm ²
Power plug	Schuko	Schuko
Weight	1,07 kg	1,07 kg
Order code	146-048	146-023

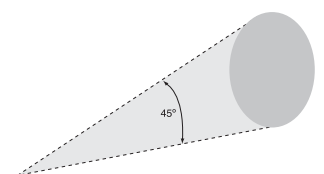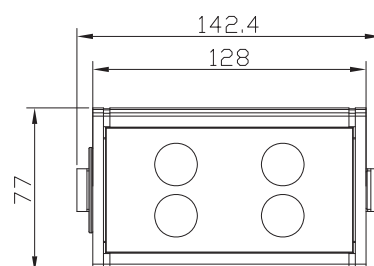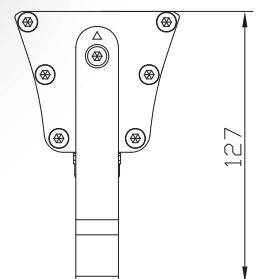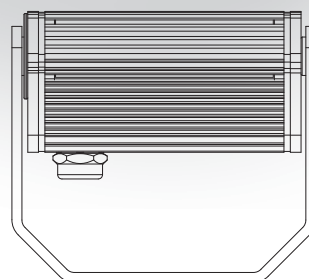

LED FloodLight

Architectural/commercial line

Perfect for lighting up small trees, bushes and gardens.

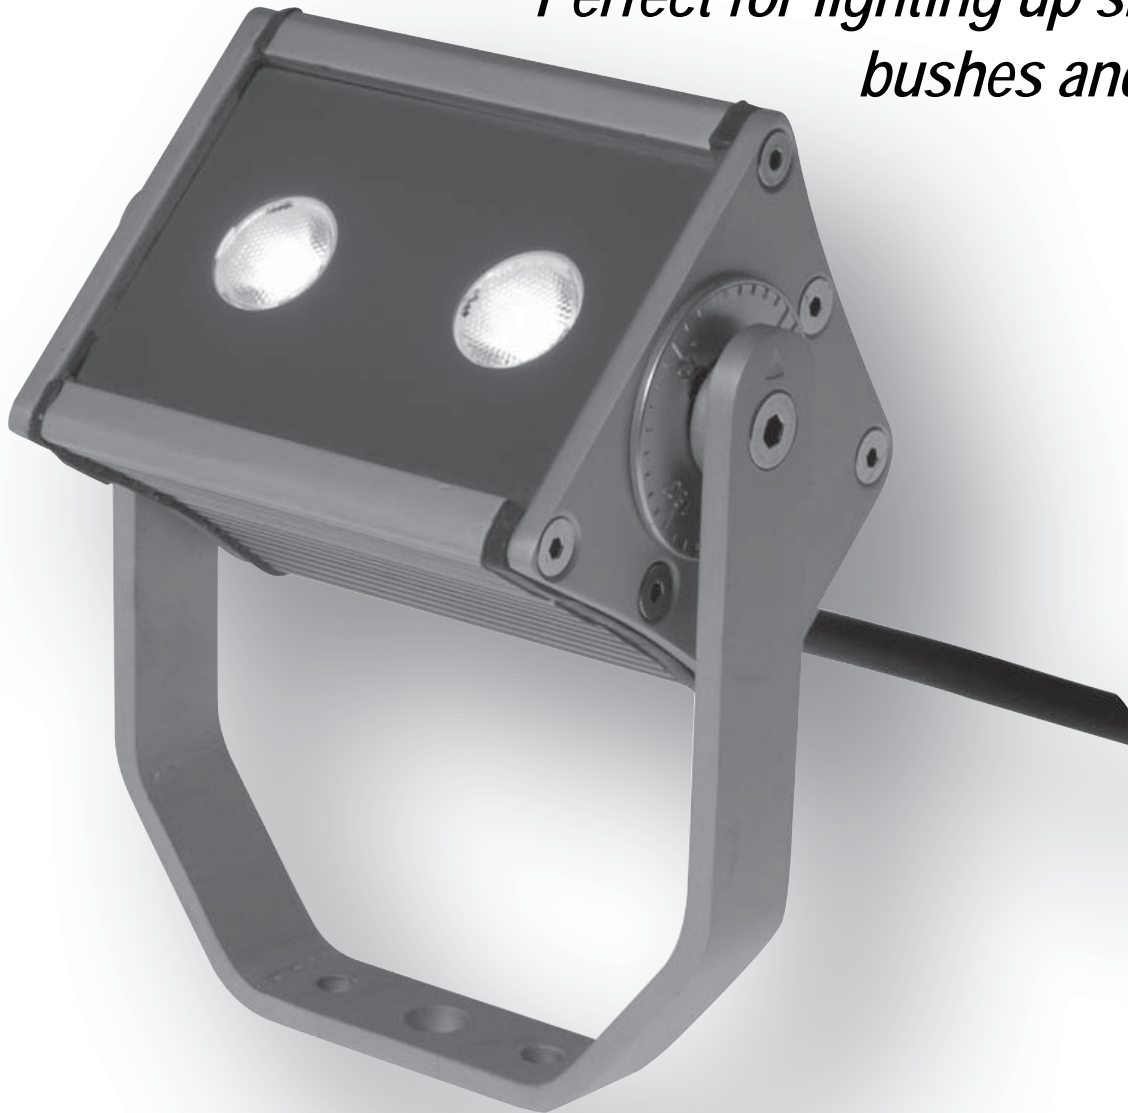

	FL-2-3W WW
Power supply	230 Volt
Power consumption	6 Watt
LED	2x P3
Lumen	214
Color	Warm white
Light angle	45° symetric
Housing material	Aluminium
Housing surface	Anodized aluminium
Water resistance	IP65
Power cable	2 m rubber 3x1 mm ²
Power plug	Schuko
Weight	0,86 kg
Order code	146-038

